

dp DELACO PANELS

Outdoor Panels


Technical Sheet




OUTDOOR SPECIFICATIONS

Our Outdoor Panels are built for durability and style, using high-quality composite materials that mimic the look of natural wood with enhanced weather resistance. Each panel is approximately 25mm thick and designed to withstand sun, rain, and changing climates without warping or fading. The actual panel width is 420mm, with 400mm of usable surface and a 20 mm overlap for seamless installation.

Perfect for external walls, fences, facades, and outdoor entertaining areas, these panels bring a warm, modern finish to any exterior. With a sleek slat design and realistic woodgrain textures, no two panels are exactly the same — offering a natural, premium aesthetic with low maintenance requirements.

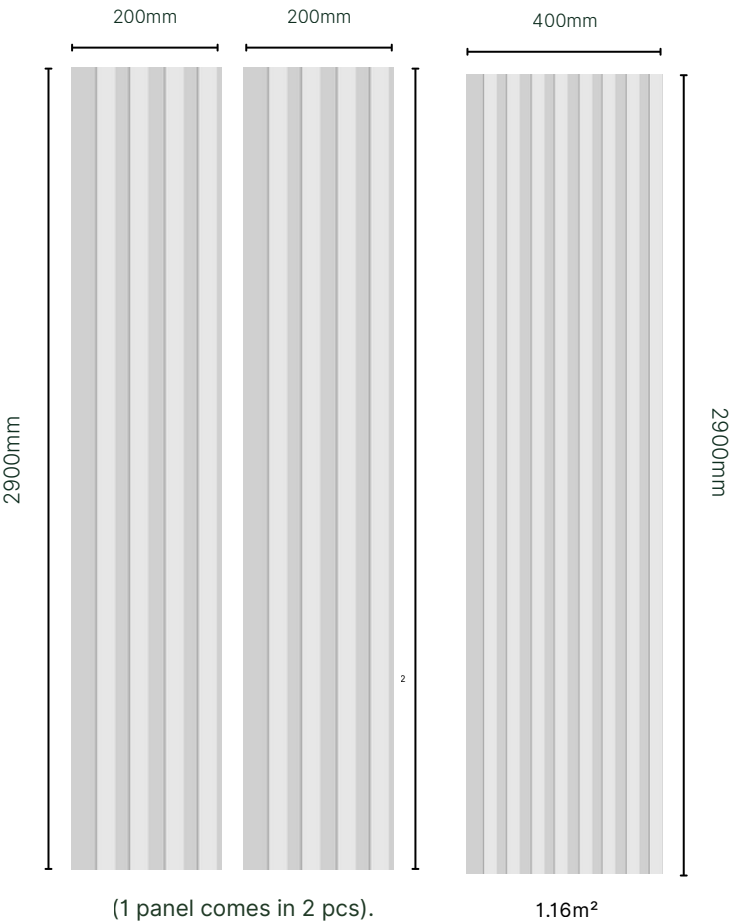


Name - Outdoor Panel
Panel (mm): H2900 x W400 x D25
Panel Coverage (m²): 1.16
Slats per panel: 8
Panel Weight (kg): 17
Composition: WPC

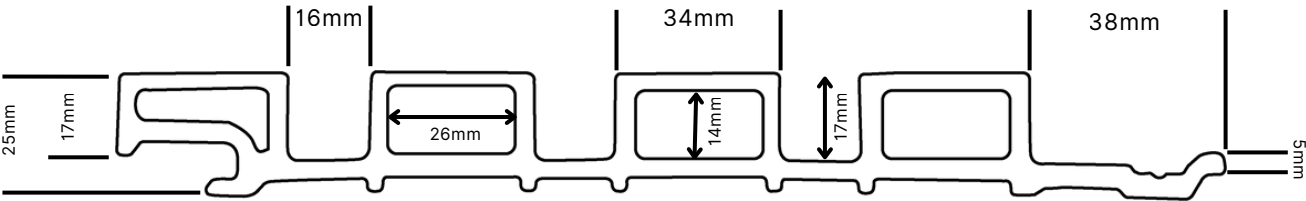


OUTDOOR INSTALLATION

VERTICAL INSTALLATION

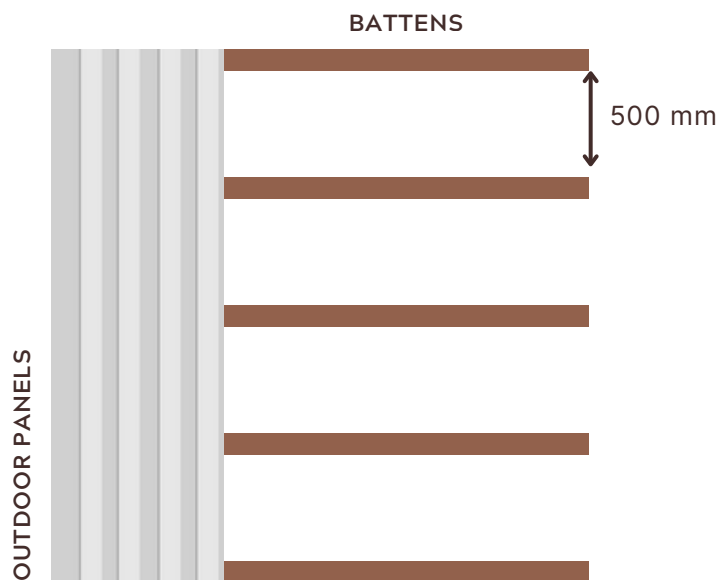

HORIZONTAL INSTALLATION

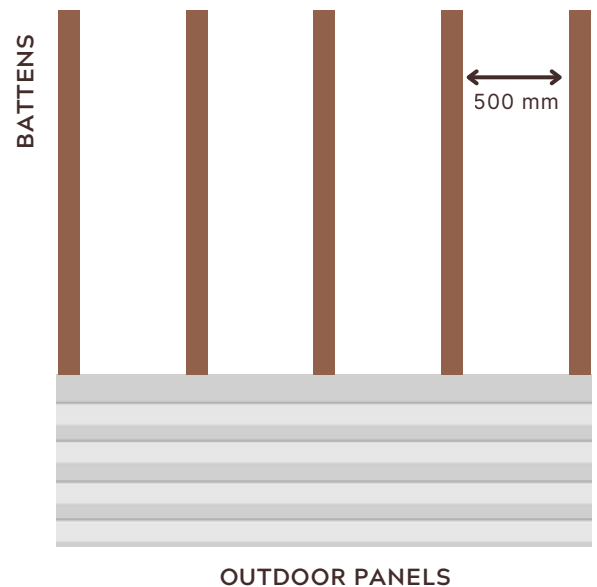

Screw Selection and Installation Guide

Choosing the Right Screws

Use standard stainless steel or approved coated deck screws and nails. Select screws made for composite cladding that can securely anchor into the subframe material (e.g., concrete, brick, Gyprock, wood, or battens).

Surface Preparation

Ensure the wall is clean, flat, and structurally sound. Do not install cladding over existing boards or directly onto flat surfaces—always use a compliant substructure. Check local building codes before installation.

Installation Tips

- Test screws on a scrap board first to avoid surface bulging or mushrooming.
- Pre-drill or change screw type if issues appear.
- Use screws long enough to penetrate at least 20 mm into the joist.
- Drive screws at a 90° angle for a secure and neat finish.

Following these steps ensures a safe, durable, and professional cladding installation.



Our team is dedicated to providing you with an outstanding customer experience, delivering the exceptional service you rightfully deserve.

☎ 1300 734484

✉ admin@delacopanel.com.au

Opening Hours:

Mon-Fri: 9:00am - 4:00pm

After hours by Appointment